

MBR2020(F)CT~MBR20200(F)CT

20.0Amp Schottky Barrier Rectifiers



Features

The plastic package carries Underwriters Laboratory
Flammability Classification 94V-0
Construction utilizes void-free molded plastic technique
Low reverse leakage
High forward surge current capability
High temperature soldering guaranteed:
250°C,MAX. for 10 seconds

Mechanical Data

Case: TO-220AB, ITO-220AB molded plastic body

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: As marked

Mounting Position: Any



TO-220AB

MBR20XXCT



ITO-220AB

MBR20XXFCT



Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	MBR 2020(F)CT	MBR 2040(F)CT	MBR 2045(F)CT	MBR 2060(F)CT	MBR 20100(F)CT	MBR 20150(F)CT	MBR 20200(F)CT	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	40	45	60	100	150	200	VOLTS
Maximum RMS voltage	V _{RMS}	14	28	32	42	70	105	140	VOLTS
Maximum DC blocking voltage	V _{DC}	20	40	45	60	100	150	200	VOLTS
Maximum average forward rectified current (see fig.1)	I _(AV)	20.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	175.0							Amps
Maximum instantaneous forward voltage at 10.0A	V _F	0.55	0.6		0.70	0.85	0.95		Volts
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	0.15				0.1			mA
		40.0				20.0			
Typical junction capacitance (NOTE 1)	C _J	550				150			pF
Typical thermal resistance (NOTE 2)	R _{θJC}	23							°C/W
Operating junction temperature range	T _J	-55 to +125				-55 to +150			°C
Storage temperature range	T _{STG}	-55 to +150							°C

Note:1.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2.Thermal resistance from junction to case

MBR2020(F)CT~MBR20200(F)CT

20.0Amp Schottky Barrier Rectifiers



Ratings And Characteristic Curves

FIG. 1- FORWARD CURRENT DERATING CURVE

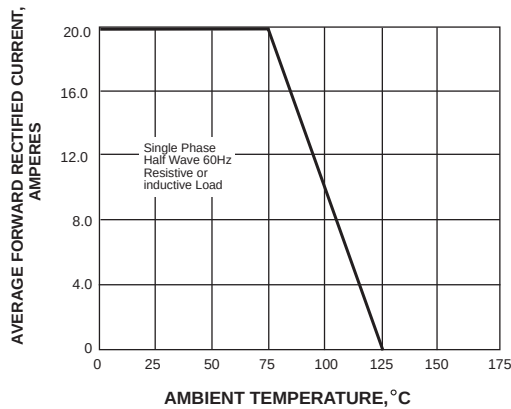


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

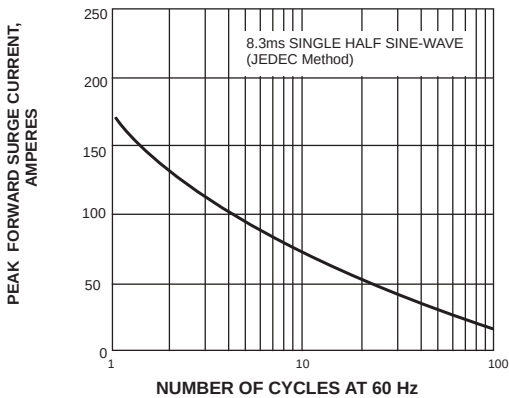


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

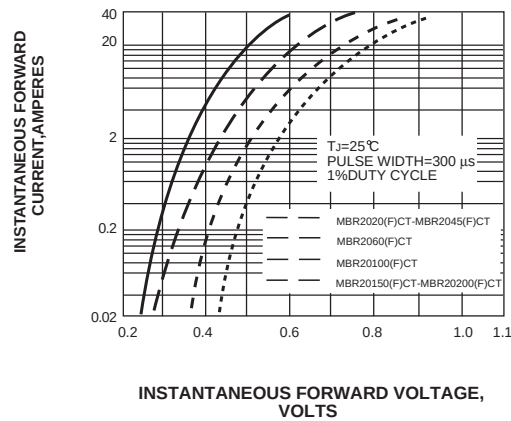


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

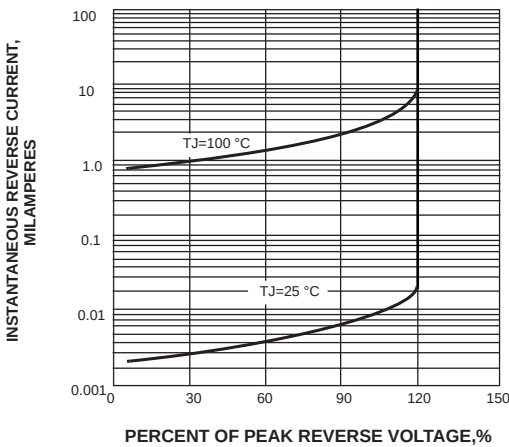


FIG. 5-TYPICAL JUNCTION CAPACITANCE


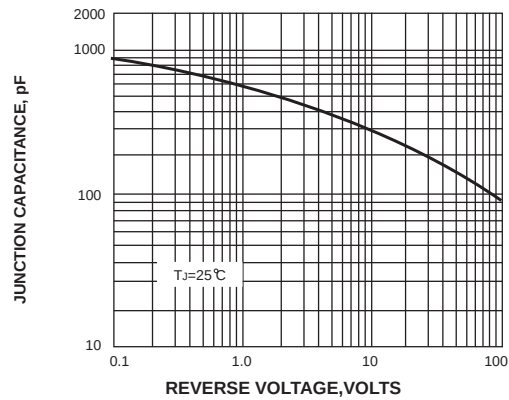


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE




MBR2020(F)CT~MBR20200(F)CT

20.0Amp Schottky Barrier Rectifiers

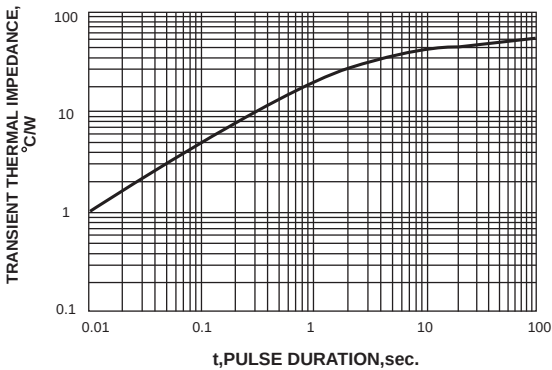


Outline Drawing

TO-220AB

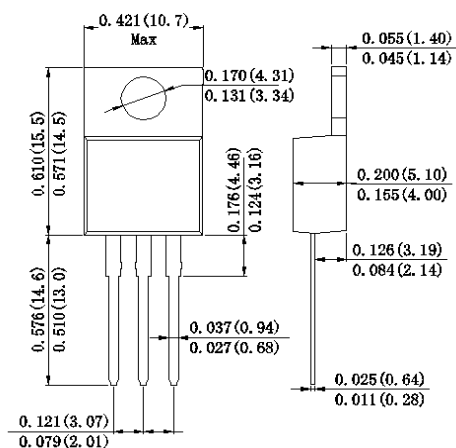

ITO-220AB

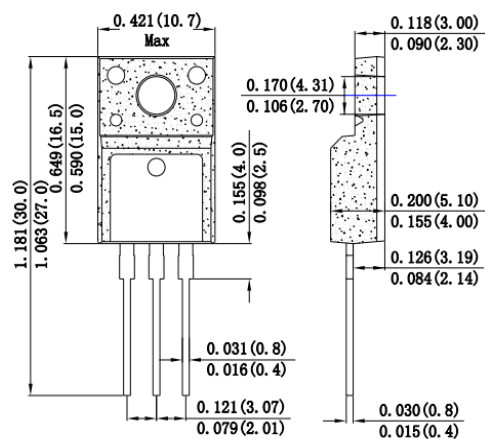

Note: All dimensions in inches and (millimeters)